




Look
inside




DRINK & DAIRY



eptarefrigeration

Our refrigerated cabinets are highly advanced and sustainable, offering unbeatable reliability when it comes to keeping up with the latest market trends in the food and beverage sector.

**Sustainable innovation, quality,
and reliability are our plug-in power.**

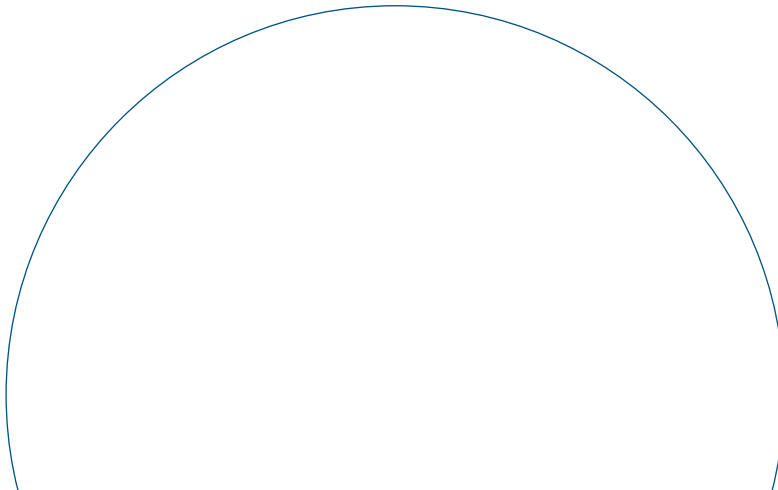

LOOK INSIDE, DIVE INTO A NEW SEASON OF FRESHNESS



larp solutions
revolutionises the
interaction with
the consumers.
They are actively
engaged
consumers,
intrigued by the
showcases and
their content,
encouraged to take
a step forward and
look inside
to discover a new
world of freshness.



larp combines
a unique mix of
advanced and
sustainable
technologies
with an innovative
approach.
Aimed at leading
progress in the
Food & Beverage
and Ho.Re.Ca.
industries, it elevates
the overall experience
of Operators to a new
level of satisfaction.

VERTICAL



STILL SLIM WHITE, STILL SLIM BLACK	6
BITTER 42 WHITE and BLACK, BITTER 42 HIGH WHITE and BLACK	7
FIZZ 42 GREY, FIZZ 42 BLACK	8
BUBBLE 42 GREY, BUBBLE 42 BLACK	9
GLEE 42 LITE, GLEE GLASS 42, GLEE GLASS WINERY	10
EIS 104.2, EIS 112.3, EIS 112 HP, EIS 162 HP	11
EIS 112 HP BLACK, EIS 162 HP BLACK	12

WINERY



RUBY, CORAL	14
MAGENTA 408 2T WINE COOLER, SCARLET 298 2T WINE COOLER, SCARLET 298 WINE COOLER	15
BITTER W&B, BORDEAUX	16

COUNTER



COUNTER GLASS SILVER 21, 50, 68, 98	18
COUNTER GLASS BLACK 21, 50, 68, 98	19
BACK BAR 1D HINGED, BACK BAR 2D HINGED, BACK BAR 3D HINGED	20
BACK BAR 2D SLIDING, BACK BAR 3D SLIDING	21
UNIT	22

IMPULSE



CILY 50 P with Lights, JAZZ 56 P	24
NININ GL	25
JOY 30 LITE SUSHI / MEAT, JOY 30 PRIME SUSHI / MEAT, JOY 30 LITE DARK SMARTSCREEN	26

The image features three clear glass bottles, likely for water or soda, arranged diagonally across a solid blue background. The bottles are empty and have silver-colored screw caps. A large, white, sans-serif word "VERTICAL" is superimposed over the center of the image, partially enclosed by a thin white circle. The lighting creates highlights and reflections on the glass surfaces.

VERTICAL



eptarefrigeration



STILL SLIM



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	A 1 G E	A 1 G E
	STILL SLIM WHITE	STILL SLIM BLACK
Temperatura / Temperature	0° ÷ +7°C	0° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	435x517x1832	435x517x1832
Volume Lordo - Netto / Gross - Net Volume (Lt)	195 - 170	195 - 170
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	K1 / CC1	K1 / CC1
Gas Refrigerante / Refrigerant Gas	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2.02	2.02
Peso Lordo - Netto / Gross - Net Weight (Kg)	79 - 73	79 - 73
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	450x558x1965	450x558x1965
Carico / Loading Camion Bilici	110	110
Standard Trailer Capacity (L 13.60 mt)	110	110
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	52	52
Container 40" (ft)	105	105
Container 40" (ft) HC	105	105

BITTER 42

BITTER 42 HIGH



Options (extra)
personalization with logo



DATI TECNICI / TECHNICAL SPECIFICATIONS

	A G D BITTER 42 WHITE / BLACK	A G E BITTER 42 HIGH WHITE / BLACK
Temperatura / Temperature	0° ÷ +7°C	+1° ÷ +9°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	590x629x1817	590x621x2010
Volume Lordo - Netto / Gross - Net Volume (Lt)	378 - 365	421 - 409
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	K1 / CC1	K4 / CC2
Gas Refrigerante / Refrigerant Gas	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	1.96	2.58
Peso Lordo - Netto / Gross - Net Weight (Kg)	80 - 72	115 - 105
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	614,5x680x1956,5	614x655x2170
Carico / Loading Camion Bilici	66	63
Standard Trailer Capacity (L 13.60 mt)	66	63
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	27	27
Container 40" (ft)	57	57
Container 40" (ft) HC	n.a.	n.a.



FIZZ 42



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	A 1 G D FIZZ 42 GREY	A 1 G D FIZZ 42 BLACK
Temperatura / Temperature	0° ÷ +7°C	0° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	590x629x2006	590x629x2006
Volume Lordo - Netto / Gross - Net Volume (Lt)	378 - 365	378 - 365
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	K1 / CC1	K1 / CC1
Gas Refrigerante / Refrigerant Gas	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2.25	2.25
Peso Lordo - Netto / Gross - Net Weight (Kg)	80 - 72	80 - 72
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	614x680x2148,4	614x680x2148,4
Carico / Loading Camion Bilici	66	66
Standard Trailer Capacity (L 13.60 mt)	66	66
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	27	27
Container 40" (ft)	57	57
Container 40" (ft) HC	n.a.	n.a.

BUBBLE 42



Options (extra)
personalization with logo



DATI TECNICI / TECHNICAL SPECIFICATIONS

	 BUBBLE 42 GREY	 BUBBLE 42 BLACK
Temperatura / Temperature	+1° ÷ +9°C	+1° ÷ +9°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	595x605x1994	595x605x1994
Volume Lordo - Netto / Gross - Net Volume (Lt)	373 - 358	373 - 358
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatica / Automatic	Automatica / Automatic
Classe Climatica / Climatic Class	K4 / CC2	K4 / CC2
Gas Refrigerante / Refrigerant Gas	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2.56	2.56
Peso Lordo - Netto / Gross - Net Weight (Kg)	88 - 80	88 - 80
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	615x640x2070	615x640x2070
Carico / Loading Camion Bilici	84	84
Standard Trailer Capacity (L 13.60 mt)	84	84
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	27	27
Container 40" (ft)	57	57
Container 40" (ft) HC	n.a.	n.a.



GLEE



Options (extra)
personalization with logo



GLEE 42 LITE



GLEE GLASS 42



GLEE GLASS WINERY

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	0° ÷ +7°C	0° ÷ +7°C	0° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	670x625x1964	670x625x1964	670x625x1964
Volume Lordo - Netto / Gross - Net Volume (Lt)	410 - 258	410 - 258	410 - 258
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatica / Automatic	Automatica / Automatic	Automatica / Automatic
Classe Climatica / Climatic Class	K1 / CC2	K1 / CC2	K1 / CC2
Gas Refrigerante / Refrigerant Gas	R290	R290	R290
Illuminazione Interna / Internal Light	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	3,00	3,00	3,00
Peso Lordo - Netto / Gross - Net Weight (Kg)	128 - 119	128 - 119	128 - 121
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	700x690x2120	700x690x2120	700x690x2120
Carico / Loading Camion Bilici	57	57	57
Standard Trailer Capacity (L 13.60 mt)	n.a.	n.a.	n.a.
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.
Container 20" (ft)	24	24	24
Container 40" (ft)	51	51	51
Container 40" (ft) HC	n.a.	n.a.	n.a.

EIS



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

				
	EIS 104.2	EIS 112.3	EIS 112 HP	EIS 162 HP
Temperatura / Temperature	-1° ÷ +7°C	-1° ÷ +7°C	-1° ÷ +7°C	1° ÷ +7°C
Dimensioni Mobile LxPxA Cabinet Dimensions WxDxH (mm)	1110x792x2000	1250x779x2035	1250x786x2032	1875x786x2035
Volume Lordo - Netto / Gross - Net Volume (Lt)	1040 - 750	1240 - 840	1240 - 870	1890 - 1310
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated	Ventilata / Ventilated	Ventilato / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	4 / M2	4 / M2	4 / M2	4 / M2
Gas Refrigerante / Refrigerant Gas	R290	R600a	R290	R290
Illuminazione Interna / Internal Light	LED	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	7.50	6.20	6.20	8.20
Peso Lordo - Netto / Gross - Net Weight (Kg)	197 - 184	216 - 196	216 - 196	344 - 286
Dimensioni Imballo LxPxH Packaging Dimensions WxDxH (mm)	1130x850x2060	1280x830x2155	1280x840x2170	1980x910x2200
Carico / Loading Camion Bilici	32	28	28	14
Standard Trailer Capacity (L 13.60 mt)	32	28	28	14
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.	n.a.
Container 20" (ft)	14	11	11	6
Container 40" (ft)	28	23	23	13
Container 40" (ft) HC	n.a.	n.a.	n.a.	n.a.



V E R T I C A L

EIS BLACK



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	 EIS 112 HP BLACK	 EIS 162 HP BLACK
Temperatura / Temperature	-1° ÷ +7°C	-1° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	1250x786x2032	1875x786x2035
Volume Lordo - Netto / Gross - Net Volume (Lt)	1240 - 870	1890 - 1310
Refrigerazione / Cooling System	Ventilato / Ventilated	Ventilato / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatica / Automatic	Automatica / Automatic
Classe Climatica / Climatic Class	4 / M2	4 / M2
Gas Refrigerante / Refrigerant Gas	R290	R290
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	6.20	8.20
Peso Lordo - Netto / Gross - Net Weight (Kg)	216 - 196	344 - 286
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	1280x840x2170	1980x910x2200
Carico / Loading Camion Bilici	28	14
Standard Trailer Capacity (L 13.60 mt)	28	14
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	11	6
Container 40" (ft)	23	13
Container 40" (ft) HC	n.a.	n.a.

WINERY



eptarefrigeration

RUBY
CORAL

Options (extra)
personalization with logo

**RUBY****CORAL**

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	+4° ÷ +18°C	+5° ÷ +18°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	480x470x835	380x577x785
Volume Lordo - Netto / Gross - Net Volume (Lt)	98 - 95	83,2 - 83
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Automatico / Automatic
Classe Climatica / Climatic Class	SN / N	SN / ST
Gas Refrigerante / Refrigerant Gas	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0.108 / 0.660	0.086 / 0.406
Peso Lordo - Netto / Gross - Net Weight (Kg)	30 - 27	37 - 33
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	510x520x870	435x650x825
Carico / Loading Camion Bilici	208	n.a.
Standard Trailer Capacity (L 13.60 mt)	208	n.a.
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	312	n.a.
Container 20" (ft)	88	118
Container 40" (ft)	184	248
Container 40" (ft) HC	276	270

MAGENTA 408 SCARLET 298



Options (extra)
personalization with logo



**MAGENTA 408 2T
WINE COOLER**



**SCARLET 298 2T
WINE COOLER**



**SCARLET 298
WINE COOLER**

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	+5° ÷ +12°C +12° ÷ +20°C	+5° ÷ +12°C +12° ÷ +20°C	+5° ÷ +20°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	598x690x1610	598x690x1210	598x690x1210
Volume Lordo - Netto / Gross - Net Volume (Lt)	Netto / Net 393	Netto / Net 275	Netto / Net 285
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	SN / N / ST	SN / N / ST	SN / N / ST
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0,142 - 0,698	0,127 - 0,678	0,136 - 0,676
Peso Lordo - Netto / Gross - Net Weight (Kg)	91 - 82	78 - 70	77 - 69
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	655x780x1700	655x780x1300	655x780x1300
Carico / Loading Camion Bilici	60	60	60
Standard Trailer Capacity (L 13.60 mt)	60	60	60
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	120	120	120
Container 20" (ft)	25	25	25
Container 40" (ft)	51	51	51
Container 40" (ft) HC	51	102	102



BITTER BORDEAUX



Options (extra)
personalization with logo

**BITTER W&B****BORDEAUX****DATI TECNICI / TECHNICAL SPECIFICATIONS**

Temperatura / Temperature	0° ÷ +20°C	+2° ÷ +20°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	593x599x1838	590x640x2043
Volume Lordo - Netto / Gross - Net Volume (Lt)	378 - 250	423 - 389
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	K1 / CC2	K4 / CC1
Gas Refrigerante / Refrigerant Gas	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2,25	2,18
Peso Lordo - Netto / Gross - Net Weight (Kg)	94 - 90	135 - 125
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	630x675x1945	622x644x2164
Carico / Loading Camion Bilici	63	63
Standard Trailer Capacity (L 13.60 mt)	63	63
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	27	27
Container 40" (ft)	57	57
Container 40" (ft) HC	n.a.	n.a.

Four glass bottles of different colored liquids (dark red, yellow, red, green) are lined up on a yellow background. A large white circle is centered over the bottles, and the word "COUNTER" is written in large white capital letters across the middle of the image.

COUNTER



eptarefrigeration



COUNTER GLASS SILVER



Options (extra)
personalization with logo



DATI TECNICI / TECHNICAL SPECIFICATIONS

COUNTER 21 GLASS

COUNTER 50 GLASS

COUNTER 68 GLASS

COUNTER 98 GLASS

Temperatura / Temperature	0° ÷ +7°C	0° ÷ +7°C	0° ÷ +7°C	0° ÷ +7°C
Dimensioni Mobile LxPxH Cabinet Dimensions WxDxH (mm)	350x419x488	435x500x494	435x500x680	480x500x845
Volume Lordo - Netto / Gross - Net Volume (Lt)	21 - 18	52 - 38	68 - 65	98 - 93
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	K1 / CC2	K1 / CC2	K1 / CC2	K1 / CC2
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0.75	0.85	0.85	1.00
Peso Lordo - Netto / Gross - Net Weight (Kg)	16,5 - 15	22 - 20	26 - 24	31 - 29
Dimensioni Imballo LxPxH Packaging Dimensions WxDxH (mm)	456x524x582	521x581x559	521x581x744	562x581x897
Carico / Loading Camion Bilici	504	416	312	192
Standard Trailer Capacity (L 13.60 mt)	504	416	312	288
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.	n.a.
Container 20" (ft)	n.a.	172	129	80
Container 40" (ft)	n.a.	344	258	164
Container 40" (ft) HC	480	n.a.	n.a.	n.a.

COUNTER GLASS BLACK



Options (extra)
personalization with logo



DATI TECNICI / TECHNICAL SPECIFICATIONS	COUNTER 21 GLASS	COUNTER 50 GLASS	COUNTER 68 GLASS	COUNTER 98 GLASS
Temperatura / Temperature	0° ÷ +7°C	0° ÷ +7°C	0° ÷ +7°C	0° ÷ +7°C
Dimensioni Mobile LxPxH Cabinet Dimensions WxDxH (mm)	350x419x488	435x500x494	435x500x680	480x500x845
Volume Lordo - Netto / Gross - Net Volume (Lt)	21 - 18	52 - 38	68 - 65	98 - 93
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	K1 / CC2	K1 / CC2	K1 / CC2	K1 / CC2
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0.75	0.85	0.85	1.00
Peso Lordo - Netto / Gross - Net Weight (Kg)	16,5 - 15	22 - 20	26 - 24	31 - 29
Dimensioni Imballo LxPxH Packaging Dimensions WxDxH (mm)	456x524x582	521x581x559	521x581x744	562x581x897
Carico / Loading Camion Bilici	504	416	312	192
Standard Trailer Capacity (L 13.60 mt)	504	416	312	288
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.	n.a.
Container 20" (ft)	n.a.	172	129	80
Container 40" (ft)	n.a.	344	258	164
Container 40" (ft) HC	480	n.a.	n.a.	n.a.



BACK BAR HINGED



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	 A	 B	 B
	BACK BAR 1D HINGED	BACK BAR 2D HINGED	BACK BAR 3D HINGED
Temperatura / Temperature	-1° ÷ +7°C	-1° ÷ +7°C	-1° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	600x500x860	900x500x860	1335x500x860
Volume Lordo - Netto / Gross - Net Volume (Lt)	128 - 112	208 - 175	318 - 280
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	3 / M2	3 / M2	3 / M2
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	1.25	1.96	2.65
Peso Lordo - Netto / Gross - Net Weight (Kg)	46 - 44	61 - 55	85 - 76
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	655x560x1000	955x560x1000	1390x560x1000
Carico / Loading Camion Bilici	160	112	74
Standard Trailer Capacity (L 13.60 mt)	160	112	74
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.
Container 20" (ft)	72	48	32
Container 40" (ft)	144	96	66
Container 40" (ft) HC	n.a.	n.a.	n.a.

BACK BAR SLIDING



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	A G BACK BAR 2D SLIDING	B G BACK BAR 3D SLIDING
Temperatura / Temperature	-1° ÷ +7°C	-1° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	900x500x860	1335x500x860
Volume Lordo - Netto / Gross - Net Volume (Lt)	208 - 175	318 - 280
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	3 / M2	3 / M2
Gas Refrigerante / Refrigerant Gas	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2.08	2.74
Peso Lordo - Netto / Gross - Net Weight (Kg)	61 - 55	85 - 76
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	955x560x1000	1390x560x1000
Carico / Loading Camion Bilici	112	74
Standard Trailer Capacity (L 13.60 mt)	112	74
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	48	32
Container 40" (ft)	96	66
Container 40" (ft) HC	n.a.	n.a.



Options (extra)
personalization with logo



UNIT

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	+1° ÷ 10°C
Dimensioni Mobile LxPxH / Cabinet Dimensions WxDxH (mm)	428x499x480
Volume Lordo - Netto / Gross - Net Volume (Lt)	33 - 28
Refrigerazione / Cooling System	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic
Classe Climatica / Climatic Class	3 / H1
Gas Refrigerante / Refrigerant Gas	R600a
Illuminazione Interna / Internal Light	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	1.80
Peso Lordo - Netto / Gross - Net Weight (Kg)	42 - 28
Dimensioni Imballo LxPxH / Packaging Dimensions WxDxH (mm)	475x520x547
Carico / Loading Camion Bilici	176
Standard Trailer Capacity (L 13.60 mt)	176
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.
Container 20" (ft)	80
Container 40" (ft)	208
Container 40" (ft) HC	n.a.

Three glass bottles of infused water are shown side-by-side. The left bottle contains orange slices, the middle bottle contains lime slices and a cinnamon stick, and the right bottle contains lemon slices. A large, white, sans-serif word "IMPULSE" is centered over the bottles, with a thin white circle around it.

IMPULSE



eptarefrigeration



CILY JAZZ



Options (extra)
personalization with logo



CILY 50 P with Lights



JAZZ 56 P

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	+1° ÷ +9 °C	-1° ÷ 5°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	440x440x850	560x744x1110
Volume Lordo - Netto / Gross - Net Volume (Lt)	50 - 46	163 - 65
Refrigerazione / Cooling System	Statica / Static	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Automatico / Automatic
Classe Climatica / Climatic Class	K4 / CC1	4 / M1
Gas Refrigerante / Refrigerant Gas	R600a	R290
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0.86	4.80
Peso Lordo - Netto / Gross - Net Weight (Kg)	23 - 21	69 - 63
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	486x486x935	670x800x1270
Carico / Loading Camion Bilici	270	60
Standard Trailer Capacity (L 13.60 mt)	270	60
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	405	120
Container 20" (ft)	96	23
Container 40" (ft)	192	48
Container 40" (ft) HC	n.a.	96

NININ GL



Options (extra)
personalization with logo



NININ GL

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	+1° ÷ 10°C
Dimensioni Mobile LxPxH / Cabinet Dimensions WxDxH (mm)	730x450x898
Volume Lordo - Netto / Gross - Net Volume (Lt)	95 - 68
Refrigerazione / Cooling System	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic
Classe Climatica / Climatic Class	3 / M2
Gas Refrigerante / Refrigerant Gas	R290
Illuminazione Interna / Internal Light	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2.27
Peso Lordo - Netto / Gross - Net Weight (Kg)	90 - 72
Dimensioni Imballo LxPxH / Packaging Dimensions WxDxH (mm)	770x500x1085
Carico / Loading Camion Bilici	162
Standard Trailer Capacity (L 13.60 mt)	162
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.
Container 20" (ft)	60
Container 40" (ft)	120
Container 40" (ft) HC	n.a.



Options (extra)
personalization with logo



**JOY 30 LITE SUSHI
MEAT**



**JOY 30 PRIME SUSHI
MEAT**



**JOY 30 LITE DARK
SMARTSCREEN**

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	-1° ÷ +5°C	-1° ÷ +5°C	-1° ÷ +5°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	623x739x1490	623x739x1490	623x739x1490
Volume Lordo - Netto / Gross - Net Volume (Lt)	330 - 163	330 - 163	330 - 163
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	3 / M1	3 / M1	3 / M1
Gas Refrigerante / Refrigerant Gas	R290	R290	R290
Illuminazione Interna / Internal Light	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	12,00	12,40	12,40
Peso Lordo - Netto / Gross - Net Weight (Kg)	112 - 97	112 - 97	112 - 97
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	660x790x1615	660x790x1615	660x790x1615
Carico / Loading Camion Bilici	60	60	60
Standard Trailer Capacity (L 13.60 mt)	60	60	60
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.
Container 20" (ft)	22	22	22
Container 40" (ft)	51	51	51
Container 40" (ft) HC	n.a.	n.a.	n.a.

SUSTAINABILITY, DIGITISATION AND CUSTOMER INTIMACY: **IARP DRIVERS**



Sustainability, **digitisation** and **customer intimacy** are cornerstones at the heart of Iarp and find concrete expression in the development of increasingly **efficient**, **versatile**, and **technologically advanced** solutions.



Sustainability: offering **plug-ins with low energy consumption** for a more responsible resource management, fully respecting the principles of Ecodesign and the make-use-recycle circular economy paradigm.



Digitisation: converting all Iarp models into smart systems, thanks to the LineON solution by EptaService, a digital diagnostic platform accessible from all devices. A transition for superior operational efficiency over time and the ability to geolocate plug-ins and generate reports, turning innovation into an effective tool to support Operators' sales.



Customer Intimacy: consolidating **lasting relationships** with Customers, where active analysis of market trends paves the way for synergistic collaborations to personalise existing solutions or develop new ones.



eptarefrigeration

www.iarp-plugin.com

PLUG-IN POWER



Follow us on:     Epta's channels