Look inside

COLDISTRICT

VENDING MACHINES

iarp

eptarefrigeration

**iarp**

**epta**refrigeration

Our refrigerated cabinets are highly advanced and sustainable, offering unbeatable reliability when it comes to keeping up with the latest market trends in the food and beverage sector.

**Sustainable innovation, quality, and reliability are our plug-in power.**

# LOOK INSIDE,
# DIVE INTO
# A NEW SEASON
# OF FRESHNESS

**Iarp solutions** revolutionises the interaction with the consumers. They are actively engaged consumers, intrigued by the showcases and their content, encouraged to take a step forward and **look inside to discover a new world of freshness**.

Look inside

**Iarp** combines a unique mix of **advanced and sustainable technologies** with an innovative approach. Aimed at leading progress in the Food & Beverage and Ho.Re.Ca. industries, it elevates the overall experience of Operators to a new level of satisfaction.

# SUSTAINABILITY, DIGITISATION AND CUSTOMER INTIMACY:
## IARP DRIVERS

**Sustainability, digitisation** and **customer intimacy** are cornerstones at the heart of Iarp and find concrete expression in the development of increasingly **efficient**, **versatile**, and **technologically advanced** solutions.

**Sustainability:** offering **plug-ins with low energy consumption** for a more responsible resource management, fully respecting the principles of Ecodesign and the make-use-recycle circular economy paradigm.

Coldistrict range embraces **digitalization** equipping all the vendings with protocols like MDB, Executive, and DDCMP. These enable seamless transactions, remote monitoring, and efficient data management, enhancing overall efficiency and customer experience.

**Customer Intimacy:** consolidating **lasting relationships** with Customers, where active analysis of market trends paves the way for synergistic collaborations to personalise existing solutions or develop new ones.

# FEATURES
## VENDING MACHINES

### FALL SENSOR
Detects product dropping and suspends payment in case of non-dropping.

### MDB - Executive - DDCMP
Protocols compliant with telemetry, machine monitoring and payment systems.

### RIELDA LOCK
Reprogrammable lock. Allows you to replace the key in use without replacing the lock.

### SHELVES CUSTOMIZATION TOOLLESS
Possibility of repositioning drawers inside the vending machine without the need for tools.

### ELECTRONIC PRICE DISPLAY
Remotely programmable, it gives the possibility to show other information than just the price.

### TOUCH DISPLAY
4,3 inch, customisable via USB. Assures a seamless customer experience.

### BASKET MODE
Possibility to select three different products in the same purchase. Available as software upgrade.

### CLIMATIC CLASS 4
Temperature stratification to maintain product integrity, ensuring references' optimal preservation and quality.
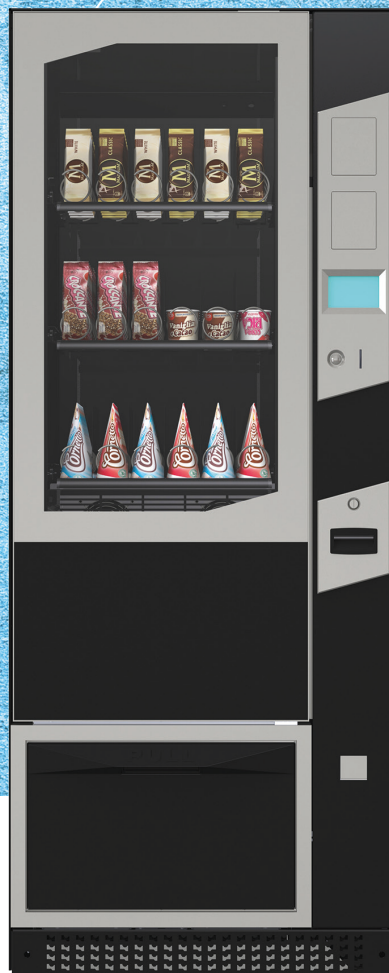
# FULL RANGE



**BRERA + BRERASLAVE**

**CHELSEA**

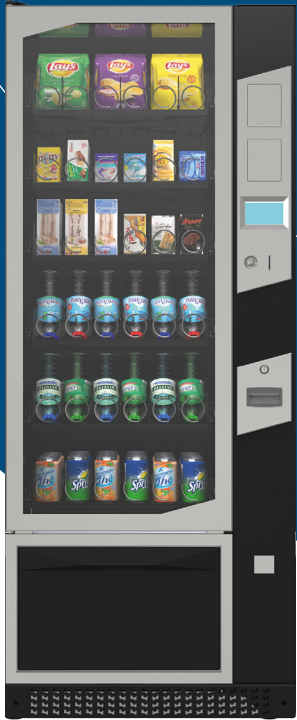*PLUG-IN POWER*

**TROCADERO**

**BROOKLYN**

# BRERA MASTER

**STANDARD CONFIGURATION**

| TECHNICAL SPECIFICATIONS | C BRERA PRO ( MASTER ) | B BRERA BOOST ( MASTER ) |
|---|---|---|
| Temperature | -1° ÷ +7°C | -1° ÷ +7°C |
| Cabinet Dimensions WxDxH ( mm ) | 743x835x1834 | 743x835x1834 |
| Gross - Net Volume ( Lt ) | 534 - 452 | 534 - 452 |
| Cooling System | Ventilated - ON/OFF | Ventilated - Variable speed |
| Defrosting System | Automatic | Automatic |
| Climatic Class | 4 / M2 | 4 / M2 |
| Refrigerant Gas | R290 | R290 |
| Internal Light | LED | LED |
| Gross / Net Weight ( Kg ) | 225 - 215 | 225 - 215 |
| Packaging Dimensions WxDxH ( mm ) | 786x930x1954 | 786x930x1954 |
| Internal color | Black | Grey |
| OPTIONS | 1 SHELF<br>ETL | 1 SHELF<br>ETL* |

*Energy class data may differ after the installation of optional accessories

# **BRERA** SLAVE

STANDARD
CONFIGURATION
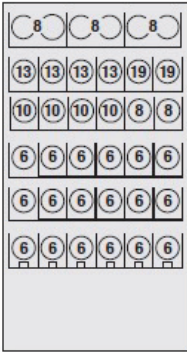


| TECHNICAL SPECIFICATIONS | C **BRERA PRO** ( SLAVE ) | B **BRERA BOOST** ( SLAVE ) |
|---|---|---|
| Temperature | -1° ÷ +7°C | -1° ÷ +7°C |
| Cabinet Dimensions WxDxH ( mm ) | 636x835x1834 | 636x835x1834 |
| Gross - Net Volume ( Lt ) | 534 - 452 | 534 - 452 |
| Cooling System | Ventilated - ON/OFF | Ventilated - Variable speed |
| Defrosting System | Automatic | Automatic |
| Climatic Class | 4 / M2 | 4 / M2 |
| Refrigerant Gas | R290 | R290 |
| Internal Light | LED | LED |
| Gross / Net Weight ( Kg ) | 199 - 190 | 199 - 190 |
| Packaging Dimensions WxDxH ( mm ) | 678x930x1954 | 678x930x1954 |
| Internal color | Black | Grey |
| OPTIONS | 1 SHELF<br>ETL | 1 SHELF<br>ETL* |

*Energy class data may differ after the installation of optional accessories

# CHELSEA

STANDARD
CONFIGURATION



| TECHNICAL SPECIFICATIONS | A→G C CHELSEA PRO | A→G B CHELSEA BOOST |
|---|---|---|
| Temperature | -1° ÷ +7°C | -1° ÷ +7°C |
| Cabinet Dimensions WxDxH ( mm ) | 898x835x1834 | 898x835x1834 |
| Gross - Net Volume ( Lt ) | 700 - 592 | 700 - 592 |
| Cooling System | Ventilated - ON/OFF | Ventilated - Variable speed |
| Defrosting System | Automatic | Automatic |
| Climatic Class | 4 / M2 | 4 / M2 |
| Refrigerant Gas | R290 | R290 |
| Internal Light | LED | LED |
| Gross / Net Weight ( Kg ) | 265 - 255 | 265 - 255 |
| Packaging Dimensions WxDxH ( mm ) | 945x930x1954 | 945x930x1954 |
| Internal color | Black | Grey |

| OPTIONS | 1 SHELF | 1 SHELF |
|---|---|---|
| | ETL | ETL* |

*Energy class data may differ after the installation of optional accessories

# TROCADERO

STANDARD
CONFIGURATION



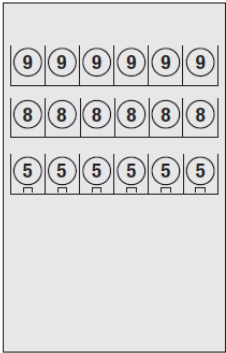| TECHNICAL SPECIFICATIONS | TROCADERO PRO | TROCADERO BOOST |
|---|---|---|
| Temperature | -1° ÷ +7°C | -1° ÷ +7°C |
| Cabinet Dimensions WxDxH ( mm ) | 1052x835x1834 | 1052x835x1834 |
| Gross - Net Volume ( Lt ) | 866 - 732 | 866 - 732 |
| Cooling System | Ventilated - ON/OFF | Ventilated - Variable speed |
| Defrosting System | Automatic | Automatic |
| Climatic Class | 4 / M2 | 4 / M2 |
| Refrigerant Gas | R290 | R290 |
| Internal Light | LED | LED |
| Gross / Net Weight ( Kg ) | 335 - 325 | 335 - 325 |
| Packaging Dimensions WxDxH ( mm ) | 1108x930x1954 | 1108x930x1954 |
| Internal color | Black | Grey |
| OPTIONS | 1 SHELF<br>ETL | 1 SHELF<br>ETL* |

*Energy class data may differ after the installation of optional accessories

# BROOKLYN

## STANDARD CONFIGURATION





| TECHNICAL SPECIFICATIONS | BROOKLYN PRO |
|---|---|
| Temperature | -25° ÷ -18°C |
| Cabinet Dimensions WxDxH ( mm ) | 748x835x1827 |
| Gross - Net Volume ( Lt ) | 323 - 264 |
| Cooling System | Ventilated |
| Defrosting System | Automatic |
| Climatic Class | 4 / L1 |
| Refrigerant Gas | R290 |
| Internal Light | LED |
| Gross / Net Weight ( Kg ) | 223 - 208 |
| Packaging Dimensions WxDxH ( mm ) | 800x930x1954 |
| Internal color | Black |
| | |
| OPTIONS | 1 SHELF |

# STIK



| TECHNICAL SPECIFICATIONS | STIK 280N |
|---|---|
| Temperature | -25° ÷ -18°C |
| Cabinet Dimensions WxDxH ( mm ) | 466x770x1830 |
| Gross - Net Volume ( Lt ) | 280 - 257 |
| Cooling System | Static |
| Defrosting System | Manual |
| Climatic Class | 4 / L1 |
| Refrigerant Gas | R290 |
| Gross / Net Weight ( Kg ) | 99 - 92 |
| Packaging Dimensions WxDxH ( mm ) | 520x920x1965 |
| Internal color | White |

A fully-fledged specialisation. Vending machines for fresh food with an exclusive plus-point: a solution also designed with the world of Frozen Foods in mind.

### GREEN EFFICIENCY:

Coldistrict range units are all refrigerated with propane gas, reflecting the sustainable innovation and evolved technological ethics of the Epta Group.

### VARIETY AND FLEXIBILITY:

the range features a number of models and configurations, both in slave and master versions. The exterior is always customisable.

### PERFECT ANYWHERE:

in office refreshment and relaxation areas, train and underground stations and in automatic vending stores. Greater connectivity, with easier maintenance.

# COLDISTRICT



**IARP, the specialist of refrigerated plug-in cabinets, introduces the COLDISTRICT range of vending solutions, perfect for Chilled and Frozen products.**

# iarp

**epta**refrigeration

www.iarp-plugin.com

PLUG-IN POWER