




Look
inside




DRINK & DAIRY



eptarefrigeration

Our refrigerated cabinets are highly advanced and sustainable, offering unbeatable reliability when it comes to keeping up with the latest market trends in the food and beverage sector.

**Sustainable innovation, quality,
and reliability are our plug-in power.**

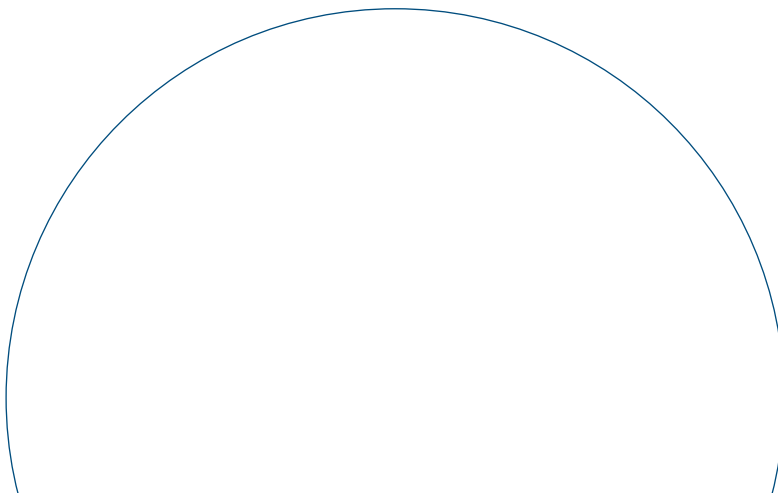

LOOK INSIDE, DIVE INTO A NEW SEASON OF FRESHNESS



larp solutions revolutionises the interaction with the consumers. They are actively engaged consumers, intrigued by the showcases and their content, encouraged to take a step forward and **look inside to discover a new world of freshness.**



larp combines a unique mix of **advanced and sustainable technologies** with an innovative approach. Aimed at leading progress in the Food & Beverage and Ho.Re.Ca. industries, it elevates the overall experience of Operators to a new level of satisfaction.

VERTICAL



STILL SLIM WHITE, STILL SLIM BLACK	6
BITTER 42 GREY, BITTER 42 BLACK	7
FIZZ 42 GREY, FIZZ 42 BLACK	8
BUBBLE 42 WHITE, BUBBLE 42 BLACK	9
GLEE 42 LITE, GLEE GLASS 42, GLEE GLASS WINERY	10
EIS 104.2, EIS 112.3, EIS 162 HP	11
EIS 112 HP BLACK, EIS 162 HP BLACK	12

WINERY



RUBY, CORAL	14
MAGENTA 408 2T WINE COOLER, SCARLET 298 2T WINE COOLER, SCARLET 298 WINE COOLER	15
BITTER W&B, BITTER WOOD W&B, BORDEAUX	16

COUNTER



COUNTER GLASS SILVER 21, 50, 68, 98	18
COUNTER GLASS BLACK 21, 50, 68, 98	19
BACK BAR 1D HINGED, BACK BAR 2D HINGED, BACK BAR 3D HINGED	20
BACK BAR 2D SLIDING, BACK BAR 3D SLIDING	21

IMPULSE



CILY 50 P with Lights, JAZZ 56 P	24
PROMOTER GL	25
JOY 30 LITE SUSHI / MEAT, JOY 30 PRIME SUSHI / MEAT, JOY 30 LITE DARK SMARTSCREEN	26

The image features three clear glass bottles of varying shapes and sizes, arranged diagonally on a solid blue background. The bottles are empty and have silver-colored screw caps. A large, white, sans-serif word "VERTICAL" is superimposed over the center of the bottles. A thin white circle is drawn around the text. In the bottom right corner, there is a logo for "iarp" in a white circle, with the text "eptarefrigeration" below it.

VERTICAL



eptarefrigeration





STILL SLIM



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS



	 STILL SLIM WHITE	 STILL SLIM BLACK
Temperatura / Temperature	0° ÷ +7°C	0° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	435x517x1832	435x517x1832
Volume Lordo - Netto / Gross - Net Volume (Lt)	195 - 170	195 - 170
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	K1 / CC1	K1 / CC1
Gas Refrigerante / Refrigerant Gas	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2.02	2.02
Peso Lordo - Netto / Gross - Net Weight (Kg)	79 - 73	79 - 73
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	450x558x1965	450x558x1965
Carico / Loading Camion Bilici	110	110
Standard Trailer Capacity (L 13.60 mt)	110	110
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	52	52
Container 40" (ft)	105	105
Container 40" (ft) HC	105	105

BITTER 42



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	 BITTER 42 GREY	 BITTER 42 BLACK
Temperatura / Temperature	0° ÷ +7°C	0° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	590x629x1817	590x629x1817
Volume Lordo - Netto / Gross - Net Volume (Lt)	378 - 365	378 - 365
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	K1 / CC1	K1 / CC1
Gas Refrigerante / Refrigerant Gas	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	1.96	1.96
Peso Lordo - Netto / Gross - Net Weight (Kg)	80 - 72	80 - 72
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	614.5x680x1956.5	614.5x680x1956.5
Carico / Loading Camion Bilici	66	66
Standard Trailer Capacity (L 13.60 mt)	66	66
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	27	27
Container 40" (ft)	57	57
Container 40" (ft) HC	n.a.	n.a.



FIZZ 42



Options (extra)
personalization with logo



FIZZ 42 **GREY**



FIZZ 42 **BLACK**

DATI TECNICI / TECHNICAL SPECIFICATIONS



Temperatura / Temperature	0° ÷ +7°C	0° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	590x629x2006	590x629x2006
Volume Lordo - Netto / Gross - Net Volume (Lt)	378 - 365	378 - 365
Refrigerazione / Cooling System	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	K1 / CC1	K1 / CC1
Gas Refrigerante / Refrigerant Gas	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2.25	2.25
Peso Lordo - Netto / Gross - Net Weight (Kg)	80 - 72	80 - 72
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	614x680x2148.4	614x680x2148.4
Carico / Loading Camion Bilici	66	66
Standard Trailer Capacity (L 13.60 mt)	66	66
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	27	27
Container 40" (ft)	57	57
Container 40" (ft) HC	n.a.	n.a.

BUBBLE 42



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	 BUBBLE 42 WHITE	 BUBBLE 42 BLACK
Temperatura / Temperature	+1° ÷ +9°C	+1° ÷ +9°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	595x605x1994	595x605x1994
Volume Lordo - Netto / Gross - Net Volume (Lt)	373 - 358	373 - 358
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatica / Automatic	Automatica / Automatic
Classe Climatica / Climatic Class	K4 / CC2	K4 / CC2
Gas Refrigerante / Refrigerant Gas	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2.56	2.56
Peso Lordo - Netto / Gross - Net Weight (Kg)	88 - 80	88 - 80
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	615x640x2070	615x640x2070
Carico / Loading Camion Bilici	84	84
Standard Trailer Capacity (L 13.60 mt)	84	84
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	27	27
Container 40" (ft)	57	57
Container 40" (ft) HC	n.a.	n.a.

GLEE



Options (extra)
personalization with logo



GLEE 42 LITE



GLEE GLASS 42



GLEE GLASS WINERY

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	0° ÷ +7°C	0° ÷ +7°C	0° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	670x625x1964	670x625x1964	670x625x1964
Volume Lordo - Netto / Gross - Net Volume (Lt)	410 - 258	410 - 258	410 - 258
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatica / Automatic	Automatica / Automatic	Automatica / Automatic
Classe Climatica / Climatic Class	K1 / CC2	K1 / CC2	K1 / CC2
Gas Refrigerante / Refrigerant Gas	R290	R290	R290
Illuminazione Interna / Internal Light	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	3.00	3.00	3.00
Peso Lordo - Netto / Gross - Net Weight (Kg)	128 - 119	128 - 119	128 - 121
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	700x690x2120	700x690x2120	700x690x2120
Carico / Loading Camion Bilici	57	57	57
Standard Trailer Capacity (L 13.60 mt)	n.a.	n.a.	n.a.
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.
Container 20" (ft)	24	24	24
Container 40" (ft)	51	51	51
Container 40" (ft) HC	n.a.	n.a.	n.a.

EIS



Options (extra)
personalization with logo



EIS 104.2



EIS 112.3



EIS 162 HP

DATI TECNICI / TECHNICAL SPECIFICATIONS

	EIS 104.2	EIS 112.3	EIS 162 HP
Temperatura / Temperature	-1° ÷ +7°C	-1° ÷ +7°C	-1° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	1110x792x2000	1250x779x2035	1875x786x2035
Volume Lordo - Netto / Gross - Net Volume (Lt)	1040 - 750	1240 - 840	1890 - 1310
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilato / Ventilated	Ventilato / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatica / Automatic	Automatica / Automatic
Classe Climatica / Climatic Class	4 / M2	4 / M2	4 / M2
Gas Refrigerante / Refrigerant Gas	R290	R600a	R290
Illuminazione Interna / Internal Light	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	7.50	6.20	8.20
Peso Lordo - Netto / Gross - Net Weight (Kg)	197 - 184	216 - 196	n.a.
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	1130x850x2060	1280x830x2155	1980x910x2200
Carico / Loading Camion Bilici	32	28	14
Standard Trailer Capacity (L 13.60 mt)	32	28	14
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.
Container 20" (ft)	14	11	6
Container 40" (ft)	28	23	13
Container 40" (ft) HC	n.a.	n.a.	n.a.





VERTICAL

EIS BLACK



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	 EIS 112 HP BLACK	 EIS 162 HP BLACK
Temperatura / Temperature	-1° ÷ +7°C	-1° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	1250x786x2032	1875x786x2035
Volume Lordo - Netto / Gross - Net Volume (Lt)	1240 - 870	1890 - 1310
Refrigerazione / Cooling System	Ventilato / Ventilated	Ventilato / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatica / Automatic	Automatica / Automatic
Classe Climatica / Climatic Class	4 / M2	4 / M2
Gas Refrigerante / Refrigerant Gas	R290	R290
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	6.20	8.20
Peso Lordo - Netto / Gross - Net Weight (Kg)	216 - 196	n.a.
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	1280x840x2170	1980x910x2200
Carico / Loading Camion Bilici	28	14
Standard Trailer Capacity (L 13.60 mt)	28	14
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	11	6
Container 40" (ft)	23	13
Container 40" (ft) HC	n.a.	n.a.

PLUG-IN AND SWITCH ON YOUR BUSINESS!



WINERY



eptarefrigeration





RUBY CORAL



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	 RUBY	 CORAL
Temperatura / Temperature	+4° ÷ +18°C	+5° ÷ +18°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	480x470x835	380x577x785
Volume Lordo - Netto / Gross - Net Volume (Lt)	98 - 95	83.2 - 83
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Automatico / Automatic
Classe Climatica / Climatic Class	SN / N	SN / ST
Gas Refrigerante / Refrigerant Gas	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0.108 / 0.660	0.086 / 0.406
Peso Lordo - Netto / Gross - Net Weight (Kg)	30 - 27	37 - 33
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	510x520x870	435x650x825
Carico / Loading Camion Bilici	208	n.a.
Standard Trailer Capacity (L 13.60 mt)	208	n.a.
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	312	n.a.
Container 20" (ft)	88	118
Container 40" (ft)	184	248
Container 40" (ft) HC	276	270

MAGENTA 408 SCARLET 298



Options (extra)
personalization with logo



**MAGENTA 408 2T
WINE COOLER**



**SCARLET 298 2T
WINE COOLER**



**SCARLET 298
WINE COOLER**

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	+5° ÷ +12°C +12° ÷ +20°C	+5° ÷ +12°C +12° ÷ +20°C	+5° ÷ +20°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	598x690x1610	598x690x1210	598x690x1210
Volume Lordo - Netto / Gross - Net Volume (Lt)	Netto / Net 393	Netto / Net 275	Netto / Net 285
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	SN / N / ST	SN / N / ST	SN / N / ST
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0.142 - 0.698	0.127 - 0.678	0.136 - 0.676
Peso Lordo - Netto / Gross - Net Weight (Kg)	91 - 82	78 - 70	77 - 69
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	655x780x1700	655x780x1300	655x780x1300
Carico / Loading Camion Bilici	60	60	60
Standard Trailer Capacity (L 13.60 mt)	60	60	60
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.
Container 20" (ft)	25	25	25
Container 40" (ft)	51	51	51
Container 40" (ft) HC	n.a.	n.a.	n.a.



BITTER BORDEAUX



Options (extra)
personalization with logo



BITTER W&B



BITTER WOOD W&B



BORDEAUX

DATI TECNICI / TECHNICAL SPECIFICATIONS

	BITTER W&B	BITTER WOOD W&B	BORDEAUX
Temperatura / Temperature	0° ÷ +20°C	0° ÷ +20°C	+1° ÷ +9°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	593x599x1838	593x599x1838	590x640x2043
Volume Lordo - Netto / Gross - Net Volume (Lt)	375 - 250	375 - 250	423 - 389
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	K1 / CC2	K1 / CC2	K4 / CC1
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2.25	2.25	2.18
Peso Lordo - Netto / Gross - Net Weight (Kg)	94 - 90	94 - 90	135 - 125
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	630x675x1945	630x675x1945	622x644x2164
Carico / Loading Camion Bilici	63	63	63
Standard Trailer Capacity (L 13.60 mt)	63	63	63
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.
Container 20" (ft)	27	27	27
Container 40" (ft)	57	57	57
Container 40" (ft) HC	n.a.	n.a.	n.a.



COUNTER



eptarefrigeration



COUNTER GLASS SILVER



Options (extra)
personalization with logo



DATI TECNICI / TECHNICAL SPECIFICATIONS	COUNTER 21 GLASS	COUNTER 50 GLASS	COUNTER 68 GLASS	COUNTER 98 GLASS
Temperatura / Temperature	0° ÷ +7°C	0° ÷ +7°C	0° ÷ +7°C	0° ÷ +7°C
Dimensioni Mobile LxPxA Cabinet Dimensions WxDxH (mm)	350x419x488	435x500x494	435x500x680	480x500x845
Volume Lordo - Netto / Gross - Net Volume (Lt)	21 - 18	52 - 38	68 - 65	98 - 93
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	K1 / CC2	K1 / CC21	K1 / CC2	K1 / CC2
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0.75	0.85	0.85	1.00
Peso Lordo - Netto / Gross - Net Weight (Kg)	16.5 - 15	22 - 20	26 - 24	31 - 29
Dimensioni Imballo LxPxA Packaging Dimensions WxDxH (mm)	456x524x582	521x581x559	521x581x744	562x581x897
Carico / Loading Camion Bilici	504	416	312	192
Standard Trailer Capacity (L 13.60 mt)	504	416	312	288
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.	n.a.
Container 20" (ft)	n.a.	172	129	80
Container 40" (ft)	n.a.	344	258	164
Container 40" (ft) HC	480	n.a.	n.a.	n.a.

COUNTER GLASS BLACK



Options (extra)
personalization with logo



DATI TECNICI / TECHNICAL SPECIFICATIONS	COUNTER 21 GLASS	COUNTER 50 GLASS	COUNTER 68 GLASS	COUNTER 98 GLASS
Temperatura / Temperature	0° ÷ +7°C	0° ÷ +7°C	0° ÷ +7°C	0° ÷ +7°C
Dimensioni Mobile LxPxA Cabinet Dimensions WxDxH (mm)	350x419x488	435x500x494	435x500x680	480x500x845
Volume Lordo - Netto / Gross - Net Volume (Lt)	21 - 18	52 - 38	68 - 65	98 - 93
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	K1 / CC2	K1 / CC21	K1 / CC2	K1 / CC2
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0.75	0.85	0.85	1.00
Peso Lordo - Netto / Gross - Net Weight (Kg)	16.5 - 15	22 - 20	26 - 24	31 - 29
Dimensioni Imballo LxPxA Packaging Dimensions WxDxH (mm)	456x524x582	521x581x559	521x581x744	562x581x897
Carico / Loading Camion Bilici	504	416	312	192
Standard Trailer Capacity (L 13.60 mt)	504	416	312	288
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.	n.a.
Container 20" (ft)	n.a.	172	129	80
Container 40" (ft)	n.a.	344	258	164
Container 40" (ft) HC	480	n.a.	n.a.	n.a.



BACK BAR HINGED



Options (extra)
personalization with logo



BACK BAR 1D HINGED



BACK BAR 2D HINGED



BACK BAR 3D HINGED



DATI TECNICI / TECHNICAL SPECIFICATIONS	BACK BAR 1D HINGED	BACK BAR 2D HINGED	BACK BAR 3D HINGED
Temperatura / Temperature	-1° ÷ +7°C	-1° ÷ +7°C	-1° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	600x500x860	900x500x860	1335x500x860
Volume Lordo - Netto / Gross - Net Volume (Lt)	128 - 112	208 - 175	318 - 280
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	3 / M2	3 / M2	3 / M2
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	1.25	1.96	2.65
Peso Lordo - Netto / Gross - Net Weight (Kg)	46 - 44	61 - 55	85 - 76
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	655x560x1000	955x560x1000	1390x560x1000
Carico / Loading Camion Bilici	160	112	74
Standard Trailer Capacity (L 13.60 mt)	160	112	74
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.
Container 20" (ft)	72	48	32
Container 40" (ft)	144	96	66
Container 40" (ft) HC	n.a.	n.a.	n.a.

BACK BAR SLIDING



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	 BACK BAR 2D SLIDING	 BACK BAR 3D SLIDING
Temperatura / Temperature	-1° ÷ +7°C	-1° ÷ +7°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	900x500x860	1335x500x860
Volume Lordo - Netto / Gross - Net Volume (Lt)	208 - 175	318 - 280
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	3 / M2	3 / M2
Gas Refrigerante / Refrigerant Gas	R600a	R600a
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2.08	2.74
Peso Lordo - Netto / Gross - Net Weight (Kg)	61 - 55	85 - 76
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	955x560x1000	1390x560x1000
Carico / Loading Camion Bilici	112	74
Standard Trailer Capacity (L 13.60 mt)	112	74
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	48	32
Container 40" (ft)	96	66
Container 40" (ft) HC	n.a.	n.a.



The image features three glass bottles filled with water and fruit slices. The left bottle contains orange slices, the middle one contains lime slices and a vanilla bean, and the right one contains lemon slices. A large, white, sans-serif word 'IMPULSE' is centered over the bottles, enclosed within a thin white circular outline. At the bottom center, there is a logo for 'iarp' in a white circle, with the text 'eptarefrigeration' below it.

IMPULSE

iarp

eptarefrigeration





CILY JAZZ



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	 CILY 50 P with Lights	 JAZZ 56 P
Temperatura / Temperature	+1° ÷ +9 °C	-1° ÷ 5°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	440x440x850	560x744x1110
Volume Lordo - Netto / Gross - Net Volume (Lt)	50 - 46	163 - 65
Refrigerazione / Cooling System	Statica / Static	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Automatico / Automatic
Classe Climatica / Climatic Class	K4 / CC1	4 / M1
Gas Refrigerante / Refrigerant Gas	R600a	R290
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0.86	4.80
Peso Lordo - Netto / Gross - Net Weight (Kg)	23 - 21	69 - 63
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	486x486x935	670x800x1270
Carico / Loading Camion Bilici	270	60
Standard Trailer Capacity (L 13.60 mt)	270	60
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	405	120
Container 20" (ft)	96	23
Container 40" (ft)	192	48
Container 40" (ft) HC	n.a.	96

PROMOTER



Options (extra)
personalization with logo



PROMOTER GL

DATI TECNICI / TECHNICAL SPECIFICATIONS	
Temperatura / Temperature	+1° ÷ 10°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	735x450x912
Volume Lordo - Netto / Gross - Net Volume (Lt)	90 - 81
Refrigerazione / Cooling System	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic
Classe Climatica / Climatic Class	3 / H1
Gas Refrigerante / Refrigerant Gas	R600a
Illuminazione Interna / Internal Light	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	1.80
Peso Lordo - Netto / Gross - Net Weight (Kg)	57 - 52
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	750x480x1090
Carico / Loading Camion Bilici	180
Standard Trailer Capacity (L 13.60 mt)	180
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.
Container 20" (ft)	72
Container 40" (ft)	144
Container 40" (ft) HC	n.a.



JOY



Options (extra)
personalization with logo



JOY 30 LITE SUSHI MEAT



JOY 30 PRIME SUSHI MEAT



JOY 30 LITE DARK SMARTSCREEN

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	-1° ÷ +7°C	-1° ÷ +7°C	-1° ÷ +5°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	623x739x1490	623x739x1490	623x739x1490
Volume Lordo - Netto / Gross - Net Volume (Lt)	330 - 163	330 - 163	330 - 163
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	3 / M1	3 / M1	3 / M1
Gas Refrigerante / Refrigerant Gas	R290	R290	R290
Illuminazione Interna / Internal Light	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	12.00	12.40	12.40
Peso Lordo - Netto / Gross - Net Weight (Kg)	112 - 97	112 - 97	112 - 97
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	660x790x1615	660x790x1615	660x790x1615
Carico / Loading Camion Bilici	60	60	60
Standard Trailer Capacity (L 13.60 mt)	60	60	60
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.
Container 20" (ft)	22	22	22
Container 40" (ft)	51	51	51
Container 40" (ft) HC	n.a.	n.a.	n.a.

SUSTAINABILITY, DIGITISATION AND CUSTOMER INTIMACY: IARP DRIVERS




Sustainability, **digitisation** and **customer intimacy** are cornerstones at the heart of Iarp and find concrete expression in the development of increasingly **efficient**, **versatile**, and **technologically advanced** solutions.



Sustainability: offering **plug-ins with low energy consumption** for a more responsible resource management, fully respecting the principles of Ecodesign and the make-use-recycle circular economy paradigm.



Digitisation: converting all Iarp models into smart systems, thanks to the LineON solution by EptaService, a digital diagnostic platform accessible from all devices. A transition for superior operational efficiency over time and the ability to geolocate plug-ins and generate reports, turning innovation into an effective tool to support Operators' sales.



Customer Intimacy: consolidating **lasting relationships** with Customers, where active analysis of market trends paves the way for synergistic collaborations to personalise existing solutions or develop new ones.



eptarefrigeration

www.iarp-plugin.com

PLUG-IN POWER



Follow us on:     Epta's channels