




Look
inside




ICE CREAM
& FROZEN FOODS



eptarefrigeration

Our refrigerated cabinets are highly advanced and sustainable, offering unbeatable reliability when it comes to keeping up with the latest market trends in the food and beverage sector.

**Sustainable innovation, quality,
and reliability are our plug-in power.**

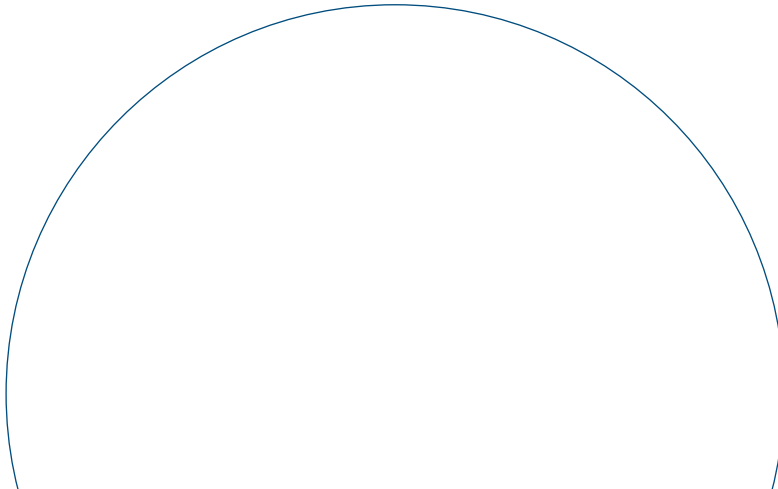

LOOK INSIDE, DIVE INTO A NEW SEASON OF FRESHNESS



larp solutions
revolutionises the
interaction with
the consumers.
They are actively
engaged
consumers,
intrigued by the
showcases and
their content,
encouraged to take
a step forward and
look inside
to discover a new
world of freshness.



larp combines
a unique mix of
advanced and
sustainable
technologies
with an innovative
approach.
Aimed at leading
progress in the
Food & Beverage
and Ho.Re.Ca.
industries, it elevates
the overall experience
of Operators to a new
level of satisfaction.

A vertical pink popsicle with a wooden stick, set against a solid green background. A thin white circle is centered over the popsicle.

VERTICAL

A top-down view of various ice cream scoops in pink, white, and yellow, along with a green and a blue spoon, on a light blue textured surface. A thin white circle is centered over the scoops.

HORIZONTAL

A chocolate-covered ice cream bar with nuts, on a wooden stick, set against a solid blue background. A thin white circle is centered over the bar.

IMPULSE

A close-up of thick, green ice cream with soft, flowing swirls. A thin white circle is centered over the swirls.

SCOOPING

VERTICAL

GLEE X-SLIM, GLEE X-SLIM NV	8
GLEE MID 21, GLEE MID 23	9
GLEE 43 LITE	10
GLEE 45 LITE, GLEE 55 LITE	11
GLEE 41, GLEE GLASS 41, GLEE GLASS 43	12
EIS 115.3, EIS 115.3 BLACK, EIS 165.3, EIS 165.3 BLACK	13

HORIZONTAL

MINIGELÉ, BRAVO 130, JAZZ 56 NP GREEN	16
VIC 150 AT, 220 AT, 330 AT, 440 AT	17
VIC 150 AT LED, 220 AT LED, 330 AT LED, 440 AT LED	18
VIC 150 CCS, 220 CCS, 330 CCS, 440 CCS	19
VIC 150 CSV, 220 CSV, 330 CSV, 440 CSV	20
GELÉ 200 AT, 300 AT, 400 AT, 500 AT	21
GELÉ 200 CCS, 300 CCS, 400 CCS, 500 CCS	22
GELÉ 200 CSV, 300 CSV, 400 CSV, 500 CSV	23
GLOBO 480 NG AT, GLOBO 700 NG AT	24
GLOBO 700 EVO NG CCS, GLOBO 700 EVO NG CSV	25

IMPULSE

EXCITE, SUPER EXCITE	28
MINI B ICE, B ICE	29
CILY 45, CILY 60	30

SCOOPING

DELIGHT 6 LITE, DELIGHT 7 LITE, DELIGHT 9 LITE	32
DELIGHT 10 LITE, DELIGHT 13 LITE	34
DELIGHT 16, DELIGHT 18, DELIGHT 20	36
GLOBO RETRÓ 220, 330, 440	38
VIC CREAMY 220, 330, 440	40



VERTICAL



eptarefrigeration



GLEE X-SLIM



Options (extra)
personalization with logo



GLEE X-SLIM



GLEE X-SLIM NV

DATI TECNICI / TECHNICAL SPECIFICATIONS	GLEE X-SLIM	GLEE X-SLIM NV
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	380x566x1811	380x566x1811
Volume Lordo - Netto / Gross - Net Volume (Lt)	170 - 131	170 - 150
Refrigerazione / Cooling System	Statica / Static	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Automatico / Automatic
Classe Climatica / Climatic Class	4 / L1	7 / L1
Gas Refrigerante / Refrigerant Gas	R290	R290
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	6.80	7.60
Peso Lordo - Netto / Gross - Net Weight (Kg)	95 - 83	93 - 81
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	560x666x1951	560x666x1951
Carico / Loading Camion Bilici	84	84
Standard Trailer Capacity (L 13.60 mt)	84	84
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	35	35
Container 40" (ft)	71	71
Container 40" (ft) HC	n.a.	n.a.

GLEE MID



Options (extra)
personalization with logo



GLEE MID 21



GLEE MID 23

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	-1° ÷ +5°C	-25° ÷ -18°C
Dimensioni Mobile LxPxH / Cabinet Dimensions WxDxH (mm)	530x641x1775	530x642x1775
Volume Lordo - Netto / Gross - Net Volume (Lt)	280 - 210	285 - 220
Refrigerazione / Cooling System	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Manuale / Manual
Classe Climatica / Climatic Class	4 / M1	7 / L1
Gas Refrigerante / Refrigerant Gas	R290	R290
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	4.30	9.50
Peso Lordo - Netto / Gross - Net Weight (Kg)	87.5 - 81	109 - 100
Dimensioni Imballo LxPxH / Packaging Dimensions WxDxH (mm)	570x690x1875	570x690x1875
Carico / Loading Camion Bilici	80	80
Standard Trailer Capacity (L 13.60 mt)	80	80
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	32	32
Container 40" (ft)	68	68
Container 40" (ft) HC	n.a.	n.a.



GLEE LITE



Options (extra)
personalization with logo



GLEE 43 LITE

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	-25° ÷ -18°C
Dimensioni Mobile LxPxH / Cabinet Dimensions WxDxH (mm)	670x640.5x1965
Volume Lordo - Netto / Gross - Net Volume (Lt)	410 - 313
Refrigerazione / Cooling System	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual
Classe Climatica / Climatic Class	7 / L1
Gas Refrigerante / Refrigerant Gas	R290
Illuminazione Interna / Internal Light	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	7.58
Peso Lordo - Netto / Gross - Net Weight (Kg)	133.5 - 126
Dimensioni Imballo LxPxH / Packaging Dimensions WxDxH (mm)	700x690x2100
Carico / Loading Camion Bilici	57
Standard Trailer Capacity (L 13.60 mt)	57
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.
Container 20" (ft)	24
Container 40" (ft)	51
Container 40" (ft) HC	n.a.

GLEE LITE



Options (extra)
personalization with logo



GLEE 45 LITE



GLEE 55 LITE

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	670x640.5x1965	670x741.5x1965
Volume Lordo - Netto / Gross - Net Volume (Lt)	410 - 258	494 - 338
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	7 / L1	7 / L1
Gas Refrigerante / Refrigerant Gas	R290	R290
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	8.19	8.69
Peso Lordo - Netto / Gross - Net Weight (Kg)	133.5 - 126	141.5 - 132
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	700x690x2120	700x790x2100
Carico / Loading Camion Bilici	57	57
Standard Trailer Capacity (L 13.60 mt)	57	57
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	24	23
Container 40" (ft)	51	49
Container 40" (ft) HC	n.a.	n.a.

GLEE 41 GLASS 41-43



Options (extra)
personalization with logo



GLEE 41



GLEE GLASS 41



GLEE GLASS 43

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	-1° ÷ +5°C	-1° ÷ +5°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	670x641x1959	670x641x1959	670x641x1965
Volume Lordo - Netto / Gross - Net Volume (Lt)	420 - 280	420 - 280	410 - 313
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Manuale / Manual
Classe Climatica / Climatic Class	4 / M2	4 / M2	4 / L1
Gas Refrigerante / Refrigerant Gas	R290	R290	R290
Illuminazione Interna / Internal Light	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	4.50	6.20	20.50
Peso Lordo - Netto / Gross - Net Weight (Kg)	115 - 106	132 - 123	163.5 - 156
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	700x690x2120	700x690x2120	700x690x2120
Carico / Loading Camion Bilici	57	57	57
Standard Trailer Capacity (L 13.60 mt)	57	57	57
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.
Container 20" (ft)	24	24	24
Container 40" (ft)	51	51	51
Container 40" (ft) HC	n.a.	n.a.	n.a.

EIS



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	 EIS 115.3 / 115.3 BLACK	 EIS 165.3 / 165.3 BLACK
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	1340x816x2040	2015x816x2040
Volume Lordo - Netto / Gross - Net Volume (Lt)	1236 - 824	1778 - 1270
Refrigerazione / Cooling System	Ventilata / Ventilated	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	3 / L1	3 / L1
Gas Refrigerante / Refrigerant Gas	R290	R290
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	18.45	26.61
Peso Lordo - Netto / Gross - Net Weight (Kg)	308 - 259	435 - 357
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	1486x950x2250	2161x950x2250
Carico / Loading Camion Bilici	23	14
Standard Trailer Capacity (L 13.60 mt)	23	14
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	8	6
Container 40" (ft)	16	12
Container 40" (ft) HC	n.a.	n.a.



A top-down view of a light blue surface with white and yellow paint splatters. Several scoops of ice cream are visible: a white one in the top left, a pink one in the top right, a pink one in the center, and a yellow one in the bottom right. Two plastic scoops, one pink and one blue, are also present. A large white circle is centered over the pink ice cream scoop in the middle.

HORIZONTAL



eptarefrigeration



MINIGELÉ BRAVO 130 JAZZ 56 NP GREEN



Options (extra)
personalization with logo



DATI TECNICI / TECHNICAL SPECIFICATIONS

	 MINIGELÉ	 BRAVO 130	 JAZZ 56 NP GREEN
Temperatura / Temperature	-22° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -1°C / -18° ÷ +5°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	584x735x1145	630x584x846	560x744x1110
Volume Lordo - Netto / Gross - Net Volume (Lt)	137 - 94	111 - 100	163 - 65
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Ventilata / Ventilated
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual	Automatico / Automatic
Classe Climatica / Climatic Class	B / C1	B / C1	3 / L2 / M1
Gas Refrigerante / Refrigerant Gas	R290	R600a	R290
Illuminazione Interna / Internal Light	LED	-	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	1.62	1.44	9.00
Peso Lordo - Netto / Gross - Net Weight (Kg)	55 - 48	37 - 35	81 - 75
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	625x770x895	638x590x875	670x800x1270
Carico / Loading Camion Bilici	126	168	57
Standard Trailer Capacity (L 13.60 mt)	126	168	57
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	189	252	n.a.
Container 20" (ft)	54	60	24
Container 40" (ft)	114	120	51
Container 40" (ft) HC	171	n.a.	n.a.

VIC AT



Options (extra)
personalization with logo



VIC 150 AT



VIC 220 AT



VIC 330 AT



VIC 440 AT

DATI TECNICI / TECHNICAL SPECIFICATIONS	VIC 150 AT	VIC 220 AT	VIC 330 AT	VIC 440 AT
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA Cabinet Dimensions WxDxH (mm)	682x651x852	1002x651x852	1252x651x852	1502x651x852
Volume Lordo - Netto / Gross - Net Volume (Lt)	142 - 94	253 - 179	340 - 245	428 - 311
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual	Manuale / Manual	Manuale / Manual
Classe Climatica / Climatic Class	B / C1	B / C1	B / C1	B / C1
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a	R600a
Illuminazione Interna / Internal Light	-	-	-	-
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0.95	1.04	1.39	2.3
Peso Lordo - Netto / Gross - Net Weight (Kg)	49 - 47	56 - 54	65 - 62	72.5 - 68.5
Dimensioni Imballo LxPxA Packaging Dimensions WxDxH (mm)	730x705x875	1050x705x875	1300x705x875	1550x705x875
Carico / Loading Camion Bilici	114	74	60	50
Standard Trailer Capacity (L 13.60 mt)	114	74	60	50
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	171	114	90	75
Container 20" (ft)	48	34	26	20
Container 40" (ft)	102	66	54	44
Container 40" (ft) HC	153	99	81	66



VIC AT LED



Options (extra)
personalization with logo



DATI TECNICI / TECHNICAL SPECIFICATIONS	VIC 150 AT LED	VIC 220 AT LED	VIC 330 AT LED	VIC 440 AT LED
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA Cabinet Dimensions WxDxH (mm)	682x651x852	1002x651x852	1252x651x852	1502x651x852
Volume Lordo - Netto / Gross - Net Volume (Lt)	142 - 94	253 - 179	340 - 245	428 - 311
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual	Manuale / Manual	Manuale / Manual
Classe Climatica / Climatic Class	B / C1	B / C1	B / C1	B / C1
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a	R600a
Illuminazione Interna / Internal Light	Standard	Standard	Standard	Standard
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	1.00	1.14	1.54	2.50
Peso Lordo - Netto / Gross - Net Weight (Kg)	51 - 49	62 - 60	72 - 65	72.5 - 68.5
Dimensioni Imballo LxPxA Packaging Dimensions WxDxH (mm)	730x705x875	1050x705x875	1300x705x875	1550x705x875
Carico / Loading Camion Bilici	114	74	60	50
Standard Trailer Capacity (L 13.60 mt)	114	74	60	50
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	171	114	90	75
Container 20" (ft)	48	34	26	20
Container 40" (ft)	102	66	54	44
Container 40" (ft) HC	153	99	81	66

VIC CCS



Options (extra)
personalization with logo



DATI TECNICI / TECHNICAL SPECIFICATIONS	VIC 150 CCS	VIC 220 CCS	VIC 330 CCS	VIC 440 CCS
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA Cabinet Dimensions WxDxH (mm)	682x651x865	1002x651x865	1252x651x865	1502x651x865
Volume Lordo - Netto / Gross - Net Volume (Lt)	146 - 112	260 - 208	348 - 284	438 - 358
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual	Manuale / Manual	Manuale / Manual
Classe Climatica / Climatic Class	B / C1	B / C1	B / C1	B / C1
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a	R600a
Illuminazione Interna / Internal Light	-	-	-	-
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0.71	0.95	1.25	1.5
Peso Lordo - Netto / Gross - Net Weight (Kg)	50 - 48	56 - 54	63 - 60	75 - 71
Dimensioni Imballo LxPxA Packaging Dimensions WxDxH (mm)	730x705x875	1050x705x875	1300x705x875	1550x705x875
Carico / Loading Camion Bilici	114	74	60	50
Standard Trailer Capacity (L 13.60 mt)	114	74	60	50
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	171	114	90	75
Container 20" (ft)	48	34	26	20
Container 40" (ft)	102	66	54	44
Container 40" (ft) HC	153	99	81	66



VIC CSV



Options (extra)
personalization with logo



DATI TECNICI / TECHNICAL SPECIFICATIONS	VIC 150 CSV	VIC 220 CSV	VIC 330 CSV	VIC 440 CSV
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxH Cabinet Dimensions WxDxH (mm)	682x651x852	1002x651x852	1252x651x852	1502x651x852
Volume Lordo - Netto / Gross - Net Volume (Lt)	149 - 112	259 - 208	356 - 284	447 - 358
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual	Manuale / Manual	Manuale / Manual
Classe Climatica / Climatic Class	B / C1	B / C1	B / C1	B / C1
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a	R600a
Illuminazione Interna / Internal Light	-	-	-	-
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0.82	1.01	1.45	1.83
Peso Lordo - Netto / Gross - Net Weight (Kg)	49 - 47	62 - 60	66 - 63	74 - 70
Dimensioni Imballo LxPxH Packaging Dimensions WxDxH (mm)	730x705x875	1050x705x875	1300x705x875	1550x705x875
Carico / Loading Camion Bilici	114	74	60	50
Standard Trailer Capacity (L 13.60 mt)	114	74	60	50
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	171	114	90	75
Container 20" (ft)	48	34	26	20
Container 40" (ft)	102	66	54	44
Container 40" (ft) HC	153	99	81	66

GELÉ AT



Options (extra)
personalization with logo



DATI TECNICI / TECHNICAL SPECIFICATIONS	GELÉ 200 AT	GELÉ 300 AT	GELÉ 400 AT	GELÉ 500 AT
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA Cabinet Dimensions WxDxH (mm)	700.5x677.5x910	1070.5x677.5x910	1290.5x677.5x910	1510.5x677.5x910
Volume Lordo - Netto / Gross - Net Volume (Lt)	170 - 126	310 - 238	394 - 305	477 - 372
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual	Manuale / Manual	Manuale / Manual
Classe Climatica / Climatic Class	C / C1	C / C1	C / C1	C / C1
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a	R600a
Illuminazione Interna / Internal Light	-	-	-	-
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	1.50	2.25	2.59	2.96
Peso Lordo - Netto / Gross - Net Weight (Kg)	42 - 38	57 - 52	61 - 55	65 - 58
Dimensioni Imballo LxPxA Packaging Dimensions WxDxH (mm)	750x730x930	1120x730x930	1340x730x930	1560x730x930
Carico / Loading Camion Bilici	96	56	60	52
Standard Trailer Capacity (L 13.60 mt)	96	56	60	52
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	144	84	90	78
Container 20" (ft)	36	24	24	22
Container 40" (ft)	78	52	50	46
Container 40" (ft) HC	n.a.	n.a.	n.a.	n.a.



GELÉ CCS



Options (extra)
personalization with logo



GELÉ 200 CCS



GELÉ 300 CCS



GELÉ 400 CCS



GELÉ 500 CCS

DATI TECNICI / TECHNICAL SPECIFICATIONS	GELÉ 200 CCS	GELÉ 300 CCS	GELÉ 400 CCS	GELÉ 500 CCS
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxH Cabinet Dimensions WxDxH (mm)	843x670x895	1063x670x895	1283x670x895	1503x670x895
Volume Lordo - Netto / Gross - Net Volume (Lt)	222 - 185	304 - 256	387 - 327	470 - 398
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual	Manuale / Manual	Manuale / Manual
Classe Climatica / Climatic Class	A / C1	A / C1	A / C1	A / C1
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a	R600a
Illuminazione Interna / Internal Light	-	-	-	-
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	1.55	1.75	2.96	3.21
Peso Lordo - Netto / Gross - Net Weight (Kg)	52 - 48	59 - 54	63 - 57	67 - 60
Dimensioni Imballo LxPxH Packaging Dimensions WxDxH (mm)	890x730x910	1120x730x910	1340x730x910	1560x730x910
Carico / Loading Camion Bilici	n.a.	n.a.	n.a.	n.a.
Standard Trailer Capacity (L 13.60 mt)	n.a.	n.a.	n.a.	n.a.
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	144	108	90	75
Container 20" (ft)	36	30	24	20
Container 40" (ft)	78	64	50	44
Container 40" (ft) HC	117	90	71	59

GELÉ CSV



Options (extra)
personalization with logo



				
DATI TECNICI / TECHNICAL SPECIFICATIONS	GELÉ 200 CSV	GELÉ 300 CSV	GELÉ 400 CSV	GELÉ 500 CSV
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxH Cabinet Dimensions WxDxH (mm)	843x670x895	1063x670x895	1283x670x895	1503x670x895
Volume Lordo - Netto / Gross - Net Volume (Lt)	222 - 185	304 - 256	387 - 327	470 - 398
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual	Manuale / Manual	Manuale / Manual
Classe Climatica / Climatic Class	A / C1	A / C1	A / C1	A / C1
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a	R600a
Illuminazione Interna / Internal Light	-	-	-	-
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	1.76	1.95	2.72	2.85
Peso Lordo - Netto / Gross - Net Weight (Kg)	52 - 48	59 - 54	63 - 57	67 - 60
Dimensioni Imballo LxPxH Packaging Dimensions WxDxH (mm)	890x730x910	1120x730x910	1340x730x910	1560x730x910
Carico / Loading Camion Bilici	n.a.	n.a.	n.a.	n.a.
Standard Trailer Capacity (L 13.60 mt)	n.a.	n.a.	n.a.	n.a.
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	144	108	90	75
Container 20" (ft)	36	30	24	20
Container 40" (ft)	78	64	50	44
Container 40" (ft) HC	117	90	71	59



GLOBO NG AT



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	A 1 G D GLOBO 480 NG AT	A 1 G D GLOBO 700 NG AT
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	1286x780x996	1516x780x1063
Volume Lordo - Netto / Gross - Net Volume (Lt)	470 - 340	623 - 476
Refrigerazione / Cooling System	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual
Classe Climatica / Climatic Class	B / C1	B / C1
Gas Refrigerante / Refrigerant Gas	R290	R290
Illuminazione Interna / Internal Light	- (LED OPTION)	- (LED OPTION)
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2.60	3.20
Peso Lordo - Netto / Gross - Net Weight (Kg)	90 - 80	115 - 98
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	1297x802x1023	1545x850x1120
Carico / Loading Camion Bilici	52	34
Standard Trailer Capacity (L 13.60 mt)	52	34
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	22	14
Container 40" (ft)	46	30
Container 40" (ft) HC	n.a.	n.a.

GLOBO 700 NG EVO



Options (extra)
personalization with logo



DATI TECNICI / TECHNICAL SPECIFICATIONS

	 GLOBO 700 NG EVO CCS	 GLOBO 700 NG EVO CSV
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	1516x780x1090	1516x780x1090
Volume Lordo - Netto / Gross - Net Volume (Lt)	630 - 578	630 - 601
Refrigerazione / Cooling System	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual
Classe Climatica / Climatic Class	B / C1	7 / L1
Gas Refrigerante / Refrigerant Gas	R290	R290
Illuminazione Interna / Internal Light	-	-
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2.50	4
Peso Lordo - Netto / Gross - Net Weight (Kg)	115 - 102	115 - 102
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	1527x802x1109	1527x802x1109
Carico / Loading Camion Bilici	48	48
Standard Trailer Capacity (L 13.60 mt)	48	48
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	14	14
Container 40" (ft)	30	30
Container 40" (ft) HC	n.a.	n.a.



IMPULSE



eptarefrigeration



EXCITE



Options (extra)
personalization with logo



DATI TECNICI / TECHNICAL SPECIFICATIONS

	A B G EXCITE LITE	A C G SUPER EXCITE
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	356x463x660	530x465x941
Volume Lordo - Netto / Gross - Net Volume (Lt)	23 - 20	73 - 62
Refrigerazione / Cooling System	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual
Classe Climatica / Climatic Class	4 / L1	7 / L1
Gas Refrigerante / Refrigerant Gas	R600a	R290
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	1.30	3.00
Peso Lordo - Netto / Gross - Net Weight (Kg)	28 - 26	63 - 56
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	500x400x685	570x525x1080
Carico / Loading Camion Bilici	366	208
Standard Trailer Capacity (L 13.60 mt)	366	208
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	144	88
Container 40" (ft)	312	184
Container 40" (ft) HC	n.a.	n.a.

B-ICE



Options (extra)
personalization with logo

DATI TECNICI / TECHNICAL SPECIFICATIONS

	 MINI B-ICE	 B-ICE
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	800x793x1270	1258x793x1270
Volume Lordo - Netto / Gross - Net Volume (Lt)	264 - 153	440 - 255
Refrigerazione / Cooling System	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Semiautomatico Semi-automatic	Semiautomatico Semi-automatic
Classe Climatica / Climatic Class	7 / L1	7 / L1
Gas Refrigerante / Refrigerant Gas	R290	R290
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	6.5	8.7
Peso Lordo - Netto / Gross - Net Weight (Kg)	100 - 86	137 - 122
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	870x865x1400	1325x865x1400
Carico / Loading Camion Bilici	30	25
Standard Trailer Capacity (L 13.60 mt)	30	25
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	60	50
Container 20" (ft)	12	11
Container 40" (ft)	26	23
Container 40" (ft) HC	n.a.	n.a.



CILY N



Options (extra)
personalization with logo



CILY 45 N



CILY 60 N

DATI TECNICI / TECHNICAL SPECIFICATIONS

Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	450x450x902	600x600x902
Volume Lordo - Netto / Gross - Net Volume (Lt)	46 - 33	97 - 68
Refrigerazione / Cooling System	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual
Classe Climatica / Climatic Class	C1 / B	C1 / B
Gas Refrigerante / Refrigerant Gas	R600a	R290
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	0.75	1.12
Peso Lordo - Netto / Gross - Net Weight (Kg)	35 - 31	45 - 38
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	510x520x965	645x645x979
Carico / Loading Camion Bilici	208	120
Standard Trailer Capacity (L 13.60 mt)	208	120
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.
Container 20" (ft)	88	54
Container 40" (ft)	184	108
Container 40" (ft) HC	n.a.	n.a.

SCOOPING



eptarefrigeration



DELIGHT 6/7/9



Options (extra)
personalization with logo



**DELIGHT 6 LITE
6 LITE PASTRY**



**DELIGHT 7 LITE
7 LITE PASTRY**




**DELIGHT 9 LITE
9 LITE PASTRY**

DATI TECNICI / TECHNICAL SPECIFICATIONS


Temperatura / Temperature	-14° ÷ -10°C	-14° ÷ -10°C	-14° ÷ -10°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	1178x737x1228	1328x737x1228	1663x737x1228
Volume Lordo - Netto / Gross - Net Volume (Lt)	202+100 - 100+75	247+124 - 130+93	296+179 - 146+134
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	5 / L1 - 7 / L1	5 / L1 - 7 / L1	5 / L1 - 7 / L1
Gas Refrigerante / Refrigerant Gas	R290	R290	R290
Illuminazione Interna / Internal Light	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	10	11.30	12.50
Peso Lordo - Netto / Gross - Net Weight (Kg)	114 - 97.5	128 - 109	161 - 138
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	1265x890x1356	1415x890x1356	1750x890x1356
Carico / Loading Camion Bilici	25	24	15
Standard Trailer Capacity (L 13.60 mt)	25	24	15
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	50	48	30
Container 20" (ft)	10	10	6
Container 40" (ft)	22	21	13
Container 40" (ft) HC	46	44	28

DELIGHT 6

VASCA ESPOSIZIONE (nr. 6 pz - VASCHETTE INOX 5 litri)
DISPLAY AREA (nr. 6 pcs - 5 liters STAINLESS STEEL TRAYS)

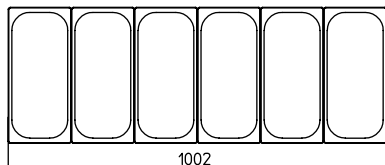


VASCA RISERVA (nr. 8 pz - VASCHETTE INOX 5 litri)
STORAGE AREA (nr. 8 pcs - 5 liters S.STEEL TRAYS)




DELIGHT 7

VASCA ESPOSIZIONE (nr. 7 pz - VASCHETTE INOX 5 litri)
DISPLAY AREA (nr. 7 pcs - 5 liters STAINLESS STEEL TRAYS)

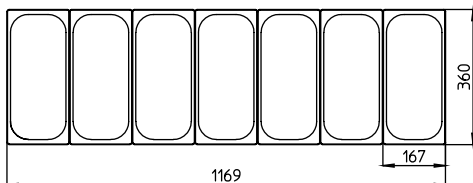


VASCA RISERVA (nr. 12 pz - VASCHETTE INOX 5 litri)
STORAGE AREA (nr. 12 pcs - 5 liters S.STEEL TRAYS)




DELIGHT 9

VASCA ESPOSIZIONE (nr. 9 pz - VASCHETTE INOX 5 litri)
DISPLAY AREA (nr. 9 pcs - 5 liters STAINLESS STEEL TRAYS)

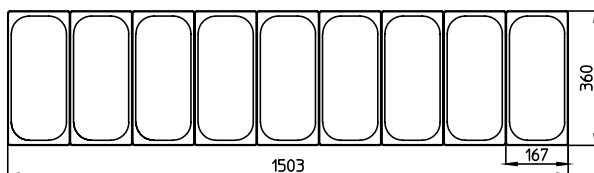

VASCA RISERVA (nr. 18 pz - VASCHETTE INOX 5 litri)
STORAGE AREA (nr. 18 pcs - 5 liters S.STEEL TRAYS)

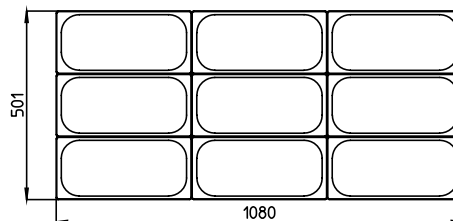



DELIGHT 10/13



Options (extra)
personalization with logo




DATI TECNICI / TECHNICAL SPECIFICATIONS


	 DELIGHT 10 LITE 10 PASTRY	 DELIGHT 13 LITE 13 PASTRY
Temperatura / Temperature	-14° ÷ -10°C	-14° ÷ -10°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	1330x841x1230	1663x833x1228
Volume Lordo - Netto / Gross - Net Volume (Lt)	295+135 - 140+62	374+205 - 178+105
Refrigerazione / Cooling System	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	5 / L1 - 7 / L1	5 / L1 - 7 / L1
Gas Refrigerante / Refrigerant Gas	R290	R290
Illuminazione Interna / Internal Light	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	11.70	15.50
Peso Lordo - Netto / Gross - Net Weight (Kg)	171 - 141.5	196 - 157.5
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	1442x1027x1340	1775x1027x1340
Carico / Loading Camion Bilici	18	15
Standard Trailer Capacity (L 13.60 mt)	18	15
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	36	30
Container 20" (ft)	8	6
Container 40" (ft)	16	13
Container 40" (ft) HC	n.a.	n.a.

DELIGHT 10

VASCA ESPOSIZIONE (nr. 10 pz - VASCHETTE INOX 5 litri)
DISPLAY AREA (nr. 10 pcs - 5 liters STAINLESS STEEL TRAYS)

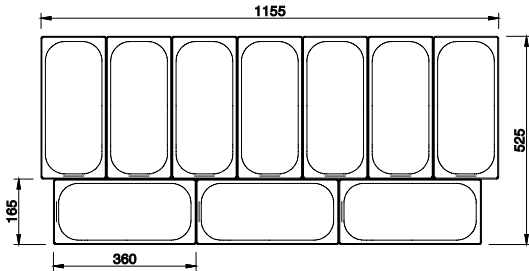


VASCA RISERVA (nr. 8 pz - VASCHETTE INOX 5 litri)
STORAGE AREA (nr. 8 pcs - 5 liters S.STEEL TRAYS)




DELIGHT 13

VASCA ESPOSIZIONE (nr. 13 pz - VASCHETTE INOX 5 litri)
DISPLAY AREA (nr. 13 pcs - 5 liters STAINLESS STEEL TRAYS)

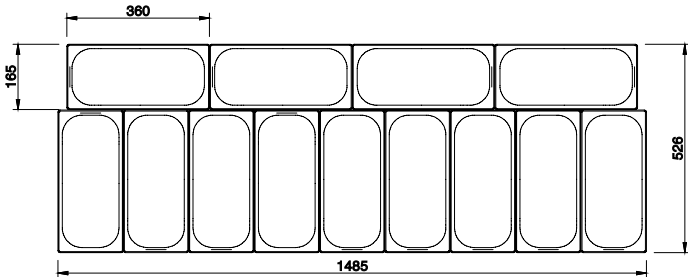

VASCA RISERVA (nr. 14 pz - VASCHETTE INOX 5 litri)
STORAGE AREA (nr. 14 pcs - 5 liters S.STEEL TRAYS)

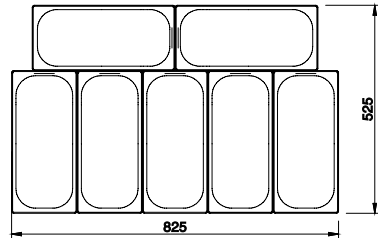



DELIGHT 16/18/20



Options (extra)
personalization with logo


DATI TECNICI / TECHNICAL SPECIFICATIONS

	 DELIGHT 16 16 PASTRY	 DELIGHT 18 / 18 PASTRY	 DELIGHT 20 / 20 PASTRY
Temperatura / Temperature	-14° ÷ -10°C	-14° ÷ -10°C	-14° ÷ -10°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	1519x1050x1324	1684x1050x1324	1850x1050x1324
Volume Lordo - Netto / Gross - Net Volume (Lt)	459 + 282	516 - 317	574 - 352
Refrigerazione / Cooling System	Statica Ibrida / Hybrid Static	Statica Ibrida / Hybrid Static	Statica Ibrida / Hybrid Static
Sistema di Sbrinamento / Defrosting System	Automatico / Automatic	Automatico / Automatic	Automatico / Automatic
Classe Climatica / Climatic Class	5 / L1 - 7 / L1	5 / L1 - 7 / L1	5 / L1 - 7 / L1
Gas Refrigerante / Refrigerant Gas	R290	R290	R290
Illuminazione Interna / Internal Light	LED	LED	LED
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	13.8	15.40	16.8
Peso Lordo - Netto / Gross - Net Weight (Kg)	290 - 225	319 - 250	348 - 275
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	1635x1190x1440	1800x1190x1440	1965x1190x1440
Carico / Loading Camion Bilici	16	14	10
Standard Trailer Capacity (L 13.60 mt)	16	14	10
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	32	28	22
Container 20" (ft)	5	5	4
Container 40" (ft)	10	10	8
Container 40" (ft) HC	n.a.	n.a.	n.a.

LAYOUT VASCHETTE / BASKETS LAYOUT


DELIGHT 16

VASCA ESPOSIZIONE (nr. 16 pz - VASCHETTE INOX 5 litri)
DISPLAY AREA (nr. 16 pcs - 5 liters STAINLESS STEEL TRAYS)

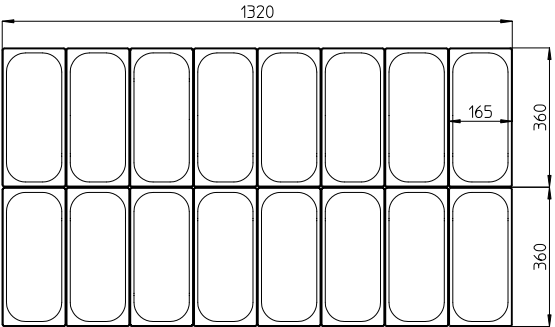


DELIGHT 18

VASCA ESPOSIZIONE (nr. 18 pz - VASCHETTE INOX 5 litri)
DISPLAY AREA (nr. 18 pcs - 5 liters STAINLESS STEEL TRAYS)

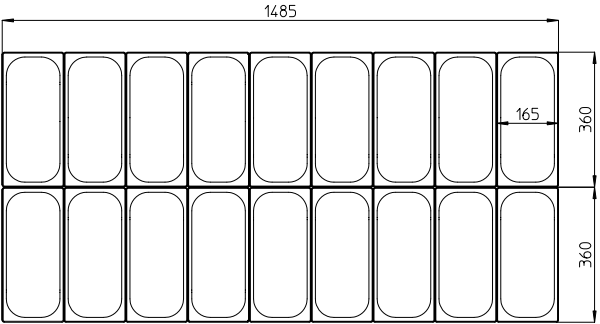


DELIGHT 20

VASCA ESPOSIZIONE (nr. 20 pz - VASCHETTE INOX 5 litri)
DISPLAY AREA (nr. 20 pcs - 5 liters STAINLESS STEEL TRAYS)

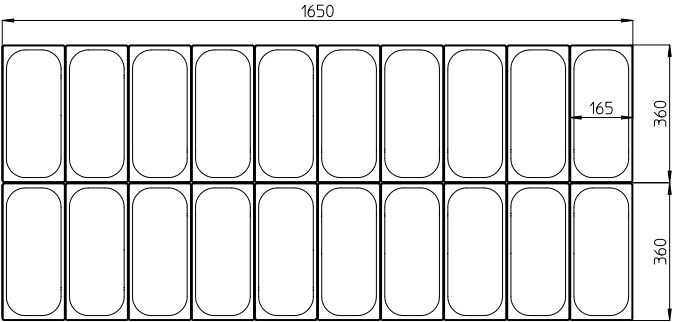



GLOBO RETRÓ

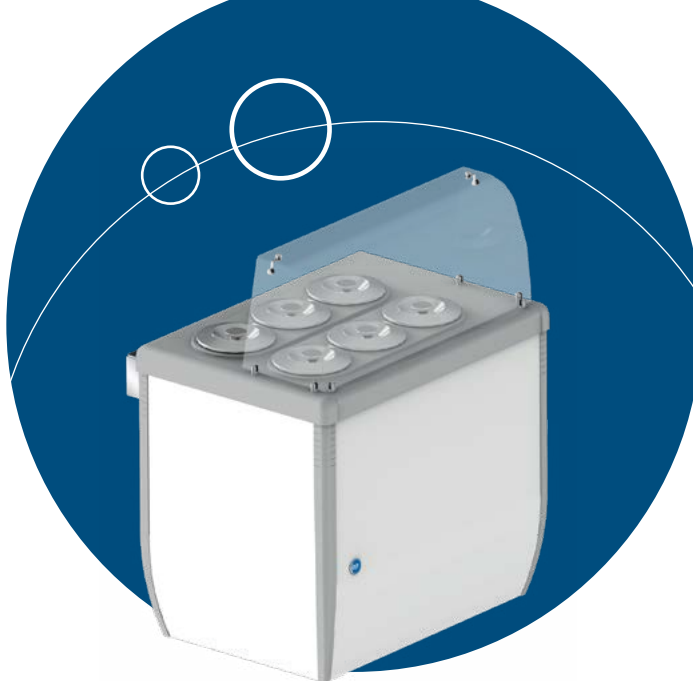

Options (extra)
personalization with logo



GLOBO RETRÓ 220




GLOBO RETRÓ 330



GLOBO RETRÓ 440


DATI TECNICI / TECHNICAL SPECIFICATIONS			
Temperatura / Temperature	-25° ÷ -18°C	-25° ÷ -18°C	-25° ÷ -18°C
Dimensioni Mobile LxPxA / Cabinet Dimensions WxDxH (mm)	770x724x1300	1020x724x1300	1270x724x1300
Volume Lordo - Netto / Gross - Net Volume (Lt)	Lordo / Gross 208 4 Carapine / Tubs (+2 Stock)	Lordo / Gross 318 6 Carapine / Tubs (+4 Stock)	Lordo / Gross 427 8 Carapine / Tubs (+6 Stock)
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual	Manuale / Manual
Classe Climatica / Climatic Class	4 / G1	4 / G1	4 / G1
Gas Refrigerante / Refrigerant Gas	R290	R290	R290
Illuminazione Interna / Internal Light	-	-	-
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	2.30	2.80	3.20
Peso Lordo - Netto / Gross - Net Weight (Kg)	77 - 62	87 - 74	109 - 84
Dimensioni Imballo LxPxA / Packaging Dimensions WxDxH (mm)	785x820x1195	1035x820x1195	1285x820x1195
Carico / Loading Camion Bilici	100	64	52
Standard Trailer Capacity (L 13.60 mt)	100	64	52
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	n.a.	n.a.	n.a.
Container 20" (ft)	14	14	11
Container 40" (ft)	30	28	23
Container 40" (ft) HC	60	56	46

GLOBO | **220**
Relia




4 TUBS (+2 STOCK)
L (W) 765
P (D) 715
A (H) 933

GLOBO | **330**
Relia



6 TUBS (+4 STOCK)
L (W) 1015
P (D) 715
A (H) 933

GLOBO | **440**
Relia



8 TUBS (+6 STOCK)
L (W) 1265
P (D) 715
A (H) 933

TUB (7.5 ltr)
DIAMETER 200 mm
H 245



LAVAPORZIONATORE /
PORTION WASHER





VIC CREAMY



Options (extra)
personalization with logo




DATI TECNICI / TECHNICAL SPECIFICATIONS

	VIC CREAMY 220	VIC CREAMY 330	VIC CREAMY 440
Temperatura / Temperature	-14° ÷ -10°C	-14° ÷ -10°C	-14° ÷ -10°C
Dimensioni Mobile LxPxA Cabinet Dimensions WxDxH (mm)	1002x652x1210 VIC 220 (only) 952x355x306 transparent bell	1252x652x1210 VIC 330 (only) 1202x355x306 transparent bell	1502x652x1210 VIC 440 (only) 1452x355x306 transparent bell
Volume Lordo - Netto / Gross - Net Volume (Lt)	259 - 208	356 - 284	447 - 358
Refrigerazione / Cooling System	Statica / Static	Statica / Static	Statica / Static
Sistema di Sbrinamento / Defrosting System	Manuale / Manual	Manuale / Manual	Manuale / Manual
Classe Climatica / Climatic Class	7 / G1	7 / G1	7 / G1
Gas Refrigerante / Refrigerant Gas	R600a	R600a	R600a
Illuminazione Interna / Internal Light	-	-	-
Consumo Energetico / Energy Consumption (kW/24h - Class 3 / Ambient 25°C RH 60%)	1.20	1.70	2
Peso Lordo - Netto / Gross - Net Weight (Kg)	59 - 57	71 - 68	74 - 70
Dimensioni Imballo LxPxA Packaging Dimensions WxDxH (mm)	1050x705x875	1350x705x875	1550x705x875
Carico / Loading Camion Bilici	60	60	50
Standard Trailer Capacity (L 13.60 mt)	60	60	50
Mega Trailer Capacity (L 13.60 mt x H 3 mt)	90	90	75
Container 20" (ft)	24	26	20
Container 40" (ft)	52	54	44
Container 40" (ft) HC	78	81	66


VIC CREAMY 220

VASCA ESPOSIZIONE (nr. 5 pz - VASCHETTE INOX 5 litri)
DISPLAY AREA (nr. 5 pcs - 5 liters STAINLESS STEEL TRAYS)

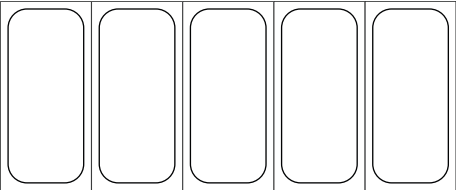


VIC CREAMY 330

VASCA ESPOSIZIONE (nr. 6 pz - VASCHETTE INOX 5 litri)
DISPLAY AREA (nr. 6 pcs - 5 liters STAINLESS STEEL TRAYS)

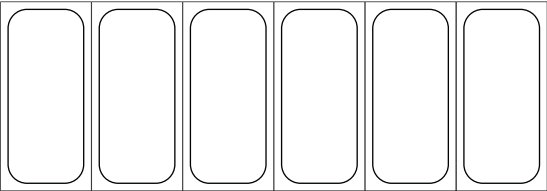

VIC CREAMY 440

VASCA ESPOSIZIONE (nr. 8 pz - VASCHETTE INOX 5 litri)
DISPLAY AREA (nr. 8 pcs - 5 liters STAINLESS STEEL TRAYS)

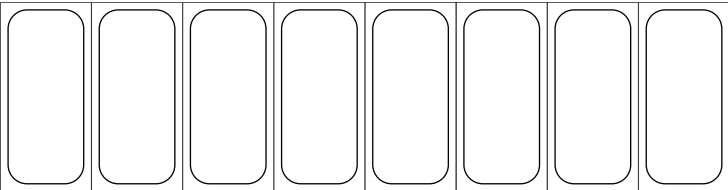



SUSTAINABILITY, DIGITISATION AND CUSTOMER INTIMACY: **IARP DRIVERS**




Sustainability, digitisation and **customer intimacy** are cornerstones at the heart of Iarp and find concrete expression in the development of increasingly **efficient, versatile,** and **technologically advanced** solutions.



Sustainability: offering **plug-ins with low energy consumption** for a more responsible resource management, fully respecting the principles of Ecodesign and the make-use-recycle circular economy paradigm.



Digitisation: converting all Iarp models into smart systems, thanks to the LineON solution by EptaService, a digital diagnostic platform accessible from all devices. A transition for superior operational efficiency over time and the ability to geolocate plug-ins and generate reports, turning innovation into an effective tool to support Operators' sales.



Customer Intimacy: consolidating **lasting relationships** with Customers, where active analysis of market trends paves the way for synergistic collaborations to personalise existing solutions or develop new ones.



eptarefrigeration

www.iarp-plugin.com

PLUG-IN POWER



Follow us on:



Epta's channels