


Coldrooms MAXI COLD ROOMS



Product Categories

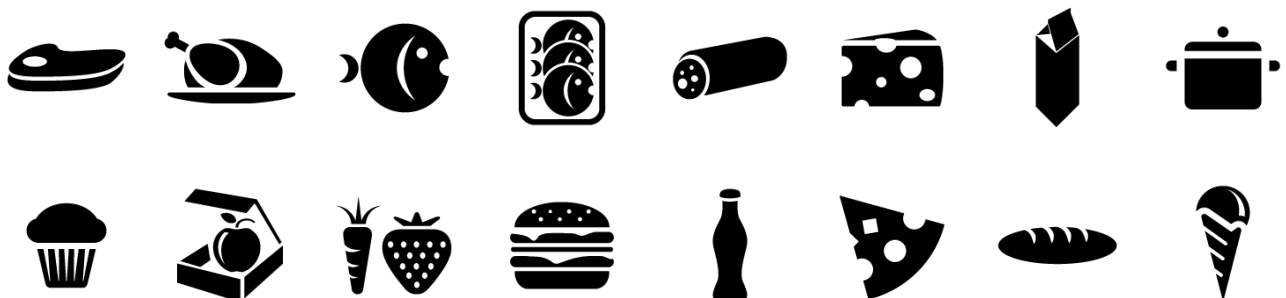

KLC COLD ROOMS		
Thickness -Spessore Stärke-Épaisseur Espesor mm	60	100
Thermal conductance Conduttanza Termica-Wärmel- eutfähigkeit-Conductance ther- mique-conductancia térmica (W/m2.K)	0.34	0.21
Thermal conductance Conduttanza Termica-Wärmel- eutfähigkeit-Conductance ther- mique-conductancia térmica (kcal/m2.h.°C)	0.29	0.18
Recommended application Applicazione consigliata Empfohlene Anwendung Application recommandée Aplicación recomendada	0	-25